TP-Link Omada EAP215-Bridge KIT Netzwerkbrücke 867 Mbit/s Weiß



Marke : TP-Link

Produktfamilie: Omada

Artikel-Code: EAP215-BRIDGE KIT

Produktname : EAP215-Bridge KIT

TP-Link Omada EAP215-Bridge KIT. Maximale Datenübertragungsrate: 867 Mbit/s, Maximal mögliche Übertragungsstrecke: 5000 m. Antennen-Design: Intern, Antennentyp: 2x2, Antenne Zunahmeniveau (max): 14 dBi. WLAN-Band: Einzelband (5 GHz), Top WLAN-Standard: Wi-Fi 5 (802.11ac), WLAN Datentransferrate (max.): 867 Mbit/s. Schnittstellentyp Ethernet-LAN: Gigabit Ethernet, Ethernet LAN Datentransferraten: 10,100,1000 Mbit/s, Netzstandard: IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11g, IEEE 802.11n. Übertragungstechnik: Verkabelt & Kabellos

Datenübertragung	
Maximale Datenübertragungsrate *	867 Mbit/s
Maximal mögliche Übertragungsstrecke	5000 m
Antenne	
Antennen-Design	Intern
Antennentyp	2x2
Antenne Zunahmeniveau (max)	14 dBi
Wireless LAN Funktionen	
WLAN	✔
WLAN-Band	Einzelband (5 GHz)
Top WLAN-Standard	Wi-Fi 5 (802.11ac)
WLAN Datentransferrate (max.)	867 Mbit/s
Frequenzband	5 GHz
Netzwerk	
Ethernet/LAN	✔
Schnittstellentyp Ethernet-LAN	Gigabit Ethernet
Ethernet LAN Datentransferraten	10,100,1000 Mbit/s
Netzstandard	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11g, IEEE 802.11n
Verkabelungstechnologie	10/100/1000Base-T(X)

Management-Funktionen	
Web-basiertes Management	✔
Merkmale	
Produkttyp *	Netzwerkbrücke
Befestigungstyp	Stange
Produktfarbe	Weiß
LED-Anzeigen	Leistung
Reset-Knopf	✔
Internationale Schutzart (IP-Code)	IP65
Quality of Service (QoS) Support	✔
Energie	
Energiequelle	Gleichstrom, PoE
DC input Spannung	12 V
Power over Ethernet (PoE)	✔
Power over Ethernet (PoE) Spannung	24 V
Betriebsbedingungen	
Betriebstemperatur	-40 - 70 °C
Relative Luftfeuchtigkeit in Betrieb	10 - 90%
Temperaturbereich bei Lagerung	-40 - 70 °C
Luftfeuchtigkeit bei Lagerung	5 - 90%
Zertifikate	
Zertifizierung	CE, FCC, RoHS

Anschlüsse und Schnittstellen	
Übertragungstechnik	Verkabelt & Kabellos
Anzahl Ethernet-LAN-Anschlüsse (RJ-45)	3
Gleichstrom-Anschluss (DC)	✔

Sicherheit	
Unterstützte Sicherheitsalgorithmen	SNMP, SNMPv2, SNMPv3, SSH
MAC Adressen Filtern	✔

Gewicht und Abmessungen	
Breite	224 mm
Tiefe	79 mm
Höhe	60 mm

Lieferumfang	
PoE+-Injektor(en)	✔
Mitgelieferte Kabel	AC




4895252502565



0840030709159



840030709159

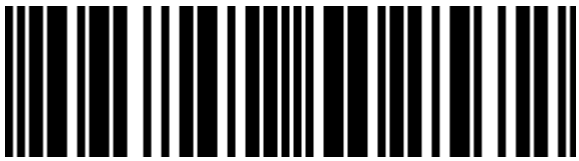

4895252502572



8885020627077




8885020627084




0810142823388




810142823388

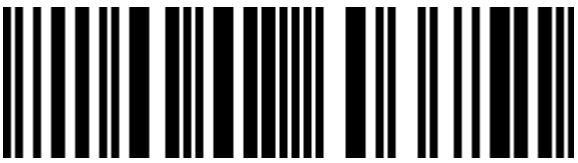

1210002603751

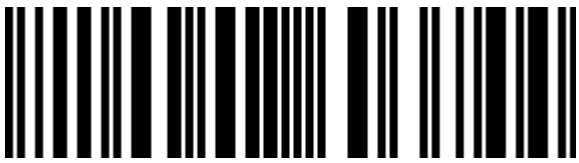

1210002603744

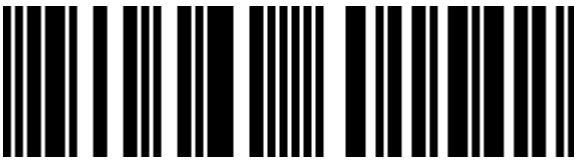

0840460601542



840460601542

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.

Publication date: 01-JUL-2026. Prints or copies of Information are only valid on the printed Publication date